


AGGREGATE HEATING EXPEDITE HYDRATION



Aggregate and mixer temperatures are tracked in such a way that temperature in the curing chamber is kept constant, against variable set points under fluctuating ambient conditions.

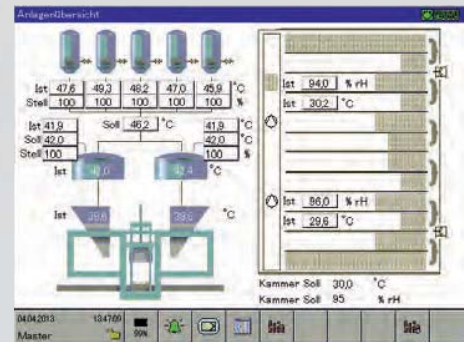

- Improved product quality thanks to repeatable curing conditions
- High early strengths
- Can be retrofitted at any time
- Power and fuel savings as the air and burner equipment is shut off automatically during breaks in production
- Operation of the production line at constant conditions all year round